


TABLE

DETECTORS TYPE	DWG.NO.	ITEM 7	CONNECTION TERMINAL FOR DETECTOR			QTY. ITEM 13	ITEM 14
			RED (+)	BLACK (-)	WHITE (RET)		
HARNESS ASSY	794079	-	-	-	-	1	-
SAFEYE SERIES 200,300,400	794079-1	T79250	13	14	2	-	TM792500
20/20 SH 20/20 SI 20/20 CTIN 20/20 CTIP	794079-3	T784200	13	14	2	1	TM784050
20/20MI 20/20ML 20/20MR 20/20MU 20/20MH			10	9	2		
20/20XI-C31 20/20XI-C32			5	6	2		
700 SERIES OPT.3 ONLY	794079-4	T79930	5	6	2	-	TM799050
40/40 SERIES	794079-5	T77750	10	11	12	-	TM777050
20/20 XI SIL	794079-6	T88970	5	6	2	-	TM889050
20/20 SI SIL			13	14	2		
700 SIL-2	794079-7	T89960	5	6	2	1	TM899050

CONNECTION LIST

FUNC.	PIN	WIRE
RS485 -	1	BLACK
RS485 +	2	RED
RTN	5	WHITE

The following is the USB adapter setup :
Unscrew the cover of the adapter and set the jumpers as follow :

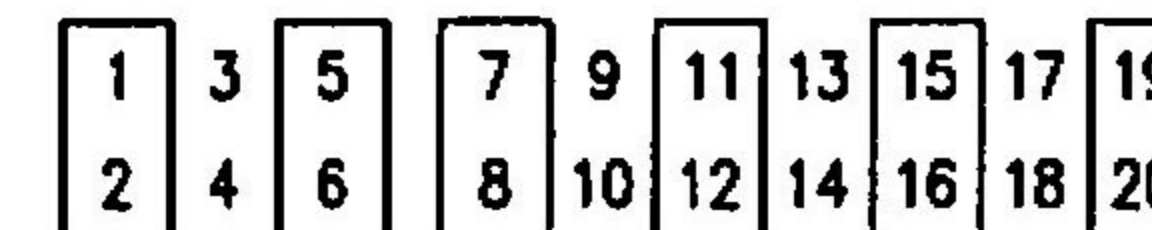

H	06.07.11								
G	01.06.09								
SYL	DESCRIPTION	DATE	APPROVAL	ITEM	QTY	PART NO.	CAT. NO.	DESCRIPTION	
REVISIONS						PARTS LIST			
TOLERANCES		SCALE		FINISHES ARE		SPECTREX INC.			
MM / DEGREES /		UNSCALED		DI MM					
MATERIAL		FINISH		SURFACE TEXTURE		USB RS485 HARNESS			
		D.C. 1.03.07		AS PER ANSI-94A1					
		NELA 5.03.07				SIZE C DWG NO. 0L-794079			
		SUBMITTED							
		APPROVED				SHEET 1 OF 1			