



Paving the Future

Optical Flame and
Open Path Gas Detection






Over 50 years of experience





Spectrex is a global leader in flame and gas detection technology, with over 50 years of experience in developing trusted solutions that provide reliable protection of high value property and personnel.


As the innovator of major industry technology standards, such as UV/IR and IR3 flame detection and the Xenon flash in open path gas detection, Spectrex continues to develop new advanced products and technologies.

Spectrex is also an industry pioneer and a global leader in the design, development and production of Automatic Fire detection and Extinguishing Systems for armored vehicles and navy vessels.

 Global leader in flame and gas detection technology

 Innovator of major industry standards – IR3, UV/IR, Xenon Flash in Open Path Gas Detection (OPGD)

 Focus and fine-tune our breakthrough products, while developing new innovations

 Trusted solutions providing reliable protection of high value property and personnel

Spectrex SharpEye 40/40 Next-Generation Series Flame Detectors

Protect People & Property

The SharpEye™ next-generation 40/40 series is based on proven Spectrex technologies, including IR3 and UV/IR. The SharpEye 40/40 series features QuadSense™ technology, the next level in flame detection, providing the fastest response to fire, increased area coverage and longest distance detection or revolutionary UV/IR technology, coupled with high sensitivity and superior immunity to false alarms, functioning in harsh conditions with unparalleled reliability and durability. With an improved design, the detectors are easy to install and maintain and come with universal wiring options and multiple output options for maximum flexibility and compatibility. Ensuring flawless operation, the next-generation series is suited to meet the challenges of wide range of industrial and commercial applications, providing superior protection of high value property and personnel to keep a SharpEye on your safety.



40/40D Series

The Next Level in The Optical Flame Detection Industry With Superior Performance and Reliability

- Extended detection range increases the detection coverage by > 2 times
- Longest distance detection with revolutionary optics in extreme environments
- Fastest – Ultra fast response to fire
- Widest operation temperature range -76 to +185 °F (-60 to +85 °C)
- Flawless operation with optical integrity - Smart Field-of-View & IR/UV BIT
- Proprietary algorithm to eliminate false alarms

SharpEye 40/40D-I

Multispectrum Quad-Sense IR3 for an exceptional ultra fast detection of hydrocarbon fires at up to 300 ft. (90 m) in under 50 msec

SharpEye 40/40D-M

Multispectrum Quad-Sense IR3 for an exceptional ultra fast detection of hydrogen at up to 165 ft. (50 m) and hydrocarbon fires at up to 300 ft. (90 m) in under 50 msec



SharpEye 40/40D-LB

Integrated UV/IR channels for an ultra fast detection of hydrocarbon-based fuel and gas, hydroxyl, hydrogen, metal, inorganic fires in under 20 msec

SharpEye 40/40D-L4B

Integrated UV/IR channels for an ultra fast detection of hydrocarbon-based fuel and gas fires in under 20 msec

Key Applications

- Oil & Gas
- Petrochemicals plants
- Pipelines
- Storage Tank farms
- Power
- Generation facilities
- Refinery Hydrogenation
- Hydrogen Fuel Cell Industry
- Chemical plants
- Space Industry hydroxyl propellant
- Explosives & Munitions



**KEEP AN EYE
ON YOUR
SAFETY**



40/40C Series

New Sharpeye Flame Detectors with Enhanced Performance

- Based on proven SPX Triple-IR (IR3)
- Long distance detection with superior immunity to false alarms
- Fast detection with strengthened reliability and durability
- Ease of use & installation with Universal wiring option
- Globally certified, for use in the most demanding applications

SharpEye 40/40C-I

Multispectrum Quad-Sense IR3 detection of hydrocarbon-based fuel and gas fires at up to 215 ft. (65 m)

SharpEye 40/40C-M

Multispectrum Quad-Sense IR3 detection of hydrocarbon fires and hydrogen flames at up to 215 ft. (65 m)



SharpEye 40/40C-LB

Integrated UV/IR channels for a fast detection of hydrocarbon and hydrogen flames in under five seconds

SharpEye 40/40C-L4B

Integrated UV/IR channels for a fast detection of hydrocarbon-based fuel and gas, hydroxyl, hydrogen, metal and inorganic fires in under five seconds

Key Applications

- Waste processing
- Food & Beverage
- Paint Booths
- Aircraft hangars
- Transportation
- Battery charging stations



**KEEP AN EYE
ON YOUR
SAFETY**



40/40 Series Specifications

	40/40D-I	40/40D-M	40/40D-LB	40/40D-L4B
Detection Range	300ft (90m)		93ft (28m)	
Field of View	Horizontal 100°; Vertical 95° Gasoline: Horizontal 80°; Vertical 80°		Horizontal 100° Vertical 95°	
Detection Method	Quad IR (QuadSense)	Quad IR (QuadSense)	UV/IR	UV/IR
Standard Response Time	Typically <2 sec at 131ft (40m)		Typically 5 sec at 93ft (28m)	
Ultra Fast Response Time	Typically <1 sec at 100ft (30m)		20 msec for flash fire pan fire from 10ft (3m) distance via analog voltage output	
High Speed Response Time (explosion)	50 msec for 1ft diameter sphere LPG-air mixture explosion at 66ft (20m) via analog voltage output		50 msec for 1ft diameter sphere LPG-air mixture explosion at 32.8ft (10m) via analog voltage output	
Built-In-Test	IR		UV & IR	
Temperature Range	-76°F to +185°F (-60°C to +85°C)			
Detects	Hydrocarbon fires	Simultaneous Hydrogen and hydrocarbon fires	Hydrocarbon-based fuel and gas, hydroxyl, hydrogen, metal, inorganic, etc.	Hydrocarbon-based fuel and gas fires
No. of Sensitivities Options	6		3	
Certifications & Approvals	ATEX&IECEX, UKCA, FM/FMC, CSA, Inmetro SIL3 compatible, DNV, EN54-10 IP66 and IP68 per EN60529, NEMA 250 6P			
The bottom Line	5 year warranty, heated optics, adjustable sensitivity levels, universal wiring, field of view integrity, anti-flare setting 6.3lb (2.9kg)			

HAZARDOUS AREA EX



RELIABILITY

SIL3

PERFORMANCE

EN54-10

FM3620



Accessories

40/40C-I	40/40C-M	40/40C-LB	40/40C-L4B
215ft (65m)		50ft (15m)	93ft (28m)
Horizontal 100°; Vertical 95° Gasoline: Horizontal 80°; Vertical 80°		Gasoline: Horizontal 80°; Vertical 80° Hydrogen: Horizontal 90°; Vertical 90°	
Quad IR (QuadSense)	Quad IR (QuadSense)	UV/IR	UV/IR
Typically < 5 sec			
-			
-			
IR		UV & IR	
-40°F to +167°F (-40°C to +75°C)			
Hydrocarbon fires	Simultaneous Hydrogen and hydrocarbon fires	Hydrocarbon-based fuel and gas, hydroxyl, hydrogen, metal, inorganic, etc.	Hydrocarbon-based fuel and gas fires
5		2	3
ATEX&IECEX, UKCA, FM/FMC, CSA, Inmetro SIL3 compatible, EN54-10 IP66 and IP68 per EN60529, NEMA 250 6P			
5 year warranty, standard heated optics, 3 adjustable sensitivity levels, universal wiring, anti-flare setting 2.8lb (1.3kg)			



Flame Simulator



Air Shield



Duct Mount



USB RS485 Harness Kit



Weather Protector



Tilt Mount



U-Bolt / Pole Mount



Cone Viewer

2020Q

Multi-Spectrum Infrared Flame Detector



The Spectrex 2020Q Multi-Spectrum Infrared Flame Detector detects hydrocarbon fires at up to 150 ft. (45 m) with unparalleled reliability.

The 2020Q is based on QuadSense™ triple infrared (IR3) technology, ensuring reliable protection with proven immunity to false alarm sources.

The 2020Q is especially designed for nonhazardous locations, delivering best-in-class performance for commercial and light-industrial applications. It is ideal for locations such as transportation infrastructure, commercial and cultural buildings, cable tunnels, and semiconductor facilities.

- Detection Range: up to 45m (150 ft)
- Temperature Range: -40 °F (-40 °C) to +158 °F (+70 °C)
- Five selectable sensitivity levels adapting to a variety of applications
- Factory calibrated for life use
- Unparalleled reliability with a lifespan of 150,000 hours
- Covered by a two-year warranty
- An internal log event recorder
- Infrared built-in test (BIT) for continuous integrity verification of optics and electronics
- Multiple output options for maximum compatibility with standard infrastructures
- Universal wiring option for a streamlined ordering process



Key Applications

- Airport terminals
- Storage areas
- Archives
- Malls
- Hospitals
- Public buildings
- Banks and offices
- Aircraft hangers
- Train stations and terminals
- Car parking towers and garages
- Historical and cultural sites
- Cable tunnels
- Automotive parts manufacturing

Accessories



Flame Simulator



Tilt mount
(stainless steel)



Flame detector pole mount
assembly, 2/3 in.



USB RS-485 harness kit



Air shield



Cone viewer



Cone Limiter

PERFORMANCE

EN54-10

FM3620

ULC386



Quasar 900 Series

The Most Reliable Gas Detector in All Weather Conditions

- Detection of hydrocarbon combustible gases
- High reliability
- Immunity to false alarms
- Performance in all weathers
- Failsafe
- Built-in data logger
- Gas library
- Minimum detectable level – 0.15 LEL m
- Simple to align and commission
- Certified for operation in hazardous locations
- 0-20mA analog output with HART capability
- RS485 Modbus, where up to 256 detectors can be linked

Quasar 900

The SafEye Quasar 900 is an open path detection system which provides continuous monitoring for combustible hydrocarbon gases. It employs “spectral fingerprint” analysis of the atmosphere using the Differential Optical Absorption Spectroscopy (DOAS) technique.

The Quasar 900 consists of a Xenon Flash infrared transmitter and infrared receiver, separated over a line of sight from 23 ft (7m) up to 660 ft (200m) in extremely harsh environments where dust, fog, rain, snow or vibration can cause a high reduction of signal.





Key Applications

- Offshore platforms & FPSOs
- Petrochemical plants
- Chemical processing plants
- Gas filling and distribution terminals
- Gas transport and pipelines
- Large storage areas & buildings
- Perimeter monitoring

Accessories



Stainless steel sunshade
Tilt Mount Pole Mount



HART Hand-Held
Diagnostic Unit



Commissioning Kit

HAZARDOUS AREA (ZONE 1)



PERFORMANCE (3 PARTY)



RELIABILITY

SIL2

Quasar 950/60 Series

Toxic Gas! Detect it Quickly and Safely

- Long Range Toxic Gas Detection up to 200ft (60m)
- Detection of toxic gases:
 - 950 Series detects H₂S, SO₂
 - 960 Series detects NH₃
- 0-20mA
 - HART Protocol for maintenance and asset management
 - RS-485, Modbus Compatible
- Simple, one-person installation, alignment, and calibration
- Multiple output options for maximum flexibility and compatibility
- Programmable configuration via the handheld unit
- Fast connection to I.S. approved handheld diagnostic/calibration unit
- 3mA “maintenance call”
- The first in the world to receive the CSA performance certification for Toxic Open Path detectors!
- Certified performance/Hazardous Area approved (FM, ATEX, IECEx, CSA, and more) for location in Zone 1 areas and 3rd party performance approved (FM, DNV)

Quasar 950/60

The SafEye Quasar open path UV detection technology includes the 950 and the 960 Series.

The Quasar 950 models detect toxic Hydrogen Sulfide gas and Sulfur Dioxide gas.

The Quasar 960 models detect toxic Ammonia gas.
both with path lengths of up to 200ft (60m).





Key Applications

- Offshore platforms & FPSOs
- Petrochemical plants
- Chemical processing plants
- Gas filling and distribution terminals
- Gas transport and pipelines
- Perimeter monitoring

Accessories



Stainless steel sunshade
Tilt Mount Pole Mount



HART Hand-Held
Diagnostic Unit



Commissioning Kit

HAZARDOUS AREA (ZONE 1)

EAC

PERFORMANCE



RELIABILITY

SIL2

Quasar 900 Series Specifications

	900
Detection Range	4 ranges up to 200m (660ft)
Response Time	Typically <2 sec
Sensitivity Range	0-5 LEL.m methane and propane 0-8 LEL.m ethylene
Temperature Range	-67°F (-55°C) to 149°F (65°C)
Detects	Wide range of hydrocarbon gases - including alkanes (methane to hexane) propane and ethylene
Approvals & Certifications	ATEX / IECEx / UKCA, CSA, C/US, SIL-2, InMetro (pending), TR CU (EAC) (pending), Republic of Korea, IP68 per EN60529
The bottom line	Factory calibrated, easy installation, low maintenance, 3 year warranty, false alarm immunity, field configurable via HART & ModBus Manager RS4B5, heated optics, built in test, real time clock (with event recorder)

950	960
3 ranges up to 60m (200ft)	3 ranges up to 60m (200ft)
Typically <3 sec	Typically <3 sec
-67°F (-55°C) to 149°F (65°C)	
H2S, SO2	NH3
ATEX / IECEx / UKCA, CSA, C/US, SIL-2, InMetro (pending), TR CU (EAC) (pending), Republic of Korea, IP68 per EN60529	
Factory calibrated, easy installation, low maintenance, 3 year warranty, false alarm immunity, field configurable via HART & ModBus Manager RS4B5, heated optics, built in test, real time clock (with event recorder)	


300 Series


Open Path Gas Detection Systems for Air Duct

- High sensitivity
- Fast response
- Low maintenance
- Proven technology
- Specially designed to perform in harsh environments
- Multiple Output Options: 0-20 mA current output; Sink (source option), HART 7.0 protocol, RS485, Modbus compatible Relays x 3 (Fault, Alarm, Accessory)

AIR DUCT

The Duct SafEye Open Path Detectors monitor ingress of hazardous flammable gas concentrations into air intakes of turbine engines and HVAC air ducts. Duct applications require that the small path across an air inlet responds with a very high sensitivity, full scale of 1 LEL.m for 2-6.6ft (0.6-2m) wide inlet and full scale of 2.5 LEL.m for 6.6-23ft (2-7m) wide inlet.

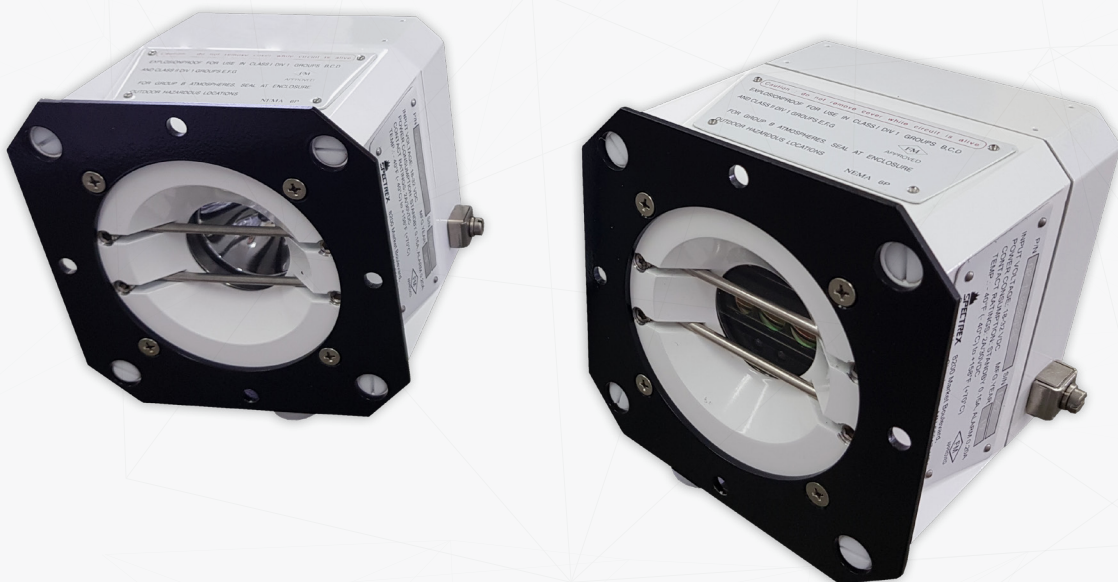

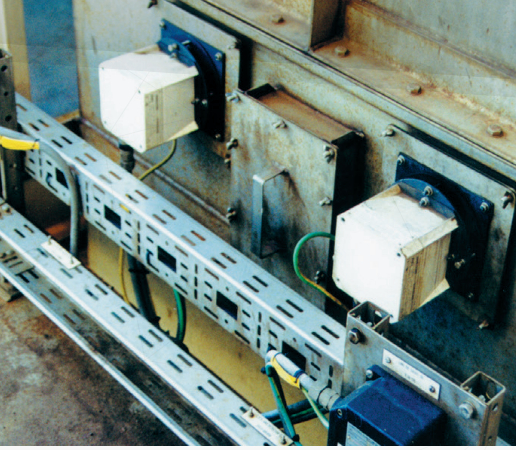

Key Applications

- HVAC ducts in accommodations
- Areas
- Air ducts in process areas
- Compressors and generators enclosures
- Curing ovens and drying equipment, printing equipment
- Engine & Turbine air intake and exhaust
- Air intakes of safety enclosures

Accessories

The following optional accessories designed for the SafEye system are available.

Duct Mounting

- Interfaces between the detector and the duct surface
- Enables the detector's alignment up to 3° in all directions

Commissioning

Alignment Kit for standard

- Required for commissioning and future maintenance checks
- One kit required per site
- Included with the kit:
 - Alignment telescope
 - Magnetic mode selector
 - Function check filter for system testing along with socket keys for access to units

HAZARDOUS AREA (ZONE 1)

PERFORMANCE





Headquarters: 8200 Market Blvd, Chanhassen, MN 55317, USA

Tel: +1 (973) 239-8398 | +1 (800) 452-2107 (US only) | Fax: +1 (973) 239-7614

E-mail: spectrex.csc.rmtna@emerson.com | www.spectrex.net